

VIEW FROM DRIVER
IF THE DIRECTION IS CW, THEN PLUG
B-O(CCW) : OTHERWISE, PLUG B-O(CW).



LD 368 KEY :

D – Shaft Size	D3 – Max. Gland Diameter	L2 – Outboard Seal Length
D1 – Stuffing Box Inside Diameter	D4 – Min. Slot Bolt Circle	L3 – Gland Width
D2 – Seal Diameter in stuffing Box	L1 – Inboard Seal Length	W – Slot Width

LD 368™ – DIMENSIONAL DATA / METRIC (mm)

Seal Code	Shaft D	D1		D2	D3	L1	L2	L3	W	D4 MIN.		
		MIN.	MAX.							M10	M12	M16
368-0025	25	41.5	48	39.4	90	34.1	51.0	26.0	11.1	70	-	-
368-0028	28	44.5	51	43.1	98	36.0	51.0	26.0	11.1	73	-	-
368-0030	30	46.0	54	44.2	104	35.6	51.0	26.0	11.1	76	-	-
368-0032	32	48.0	54	46.2	108	36.0	51.0	26.0	11.1	76	-	-
368-0033	33	51.0	58	49.4	108	36.0	50.0	25.0	11.1	80	-	-
368-0035	35	51.0	58	49.4	108	36.0	50.0	25.0	11.1	80	-	-
368-0038	38	58.0	63	55.1	120	39.0	51.0	26.0	14.3	86	89	-
368-0040	40	64.0	70	61.5	127	39.0	51.0	26.0	14.3	93	96	-
368-0043	43	64.0	70	61.5	127	39.0	51.0	26.0	14.3	93	96	-
368-0045	45	64.0	70	61.5	127	39.0	51.0	26.0	14.3	93	96	-
368-0048	48	67.0	73	64.8	127	39.5	51.2	26.0	14.3	95	98	-
368-0050	50	70.0	77	68.0	127	39.7	51.0	26.0	14.3	98	102	-
368-0053	53	73.0	79	71.0	150	39.0	51.0	26.0	17.5	105	108	-
368-0055	55	75.0	82	73.0	150	39.5	51.0	26.0	17.5	-	108	112
368-0060	60	83.0	90	81.0	162	44.1	58.0	32.2	17.5	-	115	118
368-0063	63	86.0	92	84.8	165	44.0	58.0	32.2	17.5	-	118	121
368-0065	65	90.0	95	87.3	164	43.8	58.2	32.7	17.5	-	124	127
368-0070	70	95.0	102	92.1	178	46.9	66.4	39.5	17.5	-	130	133
368-0075	75	104.0	108	98.5	184	49.8	67.0	40.0	18.0	-	140	143
368-0085	85	114.0	122	111.0	216	49.8	67.0	40.5	20.6	-	150	154
368-0095	95	124.0	132	117.5	203	50.0	70.0	43.0	20.6	-	158	162

© For special dimension could be manufactured and designed according to customer requirement.

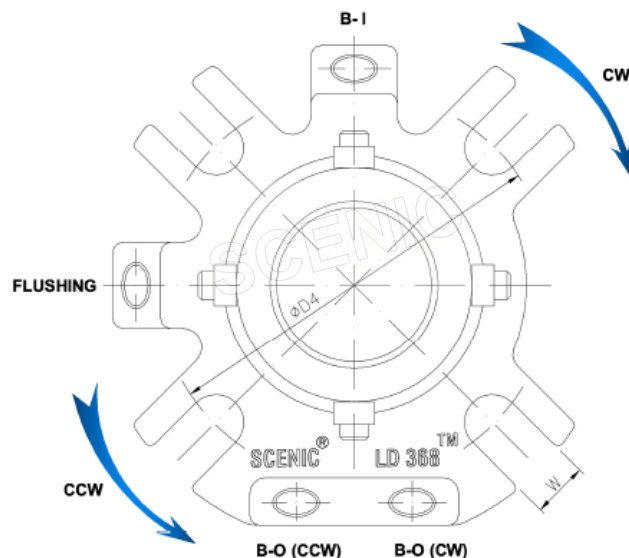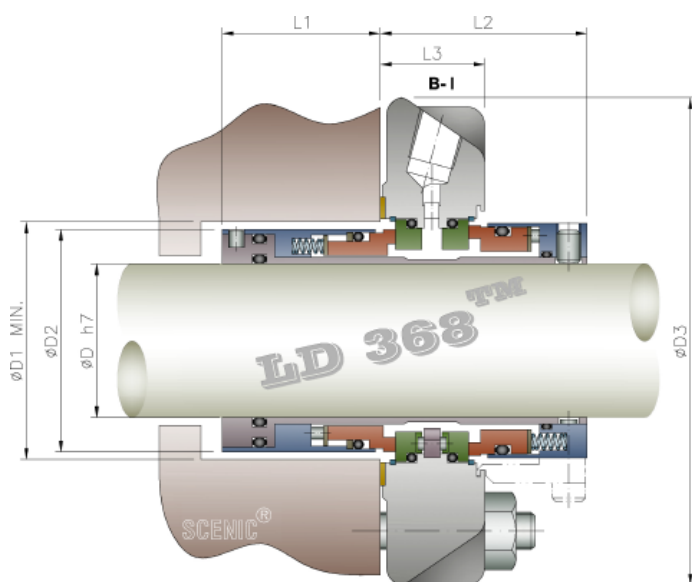

VIEW FROM DRIVER
IF THE DIRECTION IS CW, THEN PLUG
B-O(CCW) : OTHERWISE, PLUG B-O(CW).

LD 368 KEY :

- | | | |
|------------------------------------|----------------------------|---------------------------|
| D — Shaft Size | D3 — Max. Gland Diameter | L2 — Outboard Seal Length |
| D1 — Stuffing Box Inside Diameter | D4 — Min. Slot Bolt Circle | L3 — Gland Width |
| D2 — Seal Diameter in stuffing Box | L1 — Inboard Seal Length | W — Slot Width |

LD 368™ — DIMENSIONAL DATA / INCH

Seal Code	Shaft D	D1		D2	D3	L1	L2	L3	W	D4 MIN.		
		MIN.	MAX.							W3/8"	W1/2"	W5/8"
368-1000	1.000	1.625	1.875	1.551	3.543	1.343	2.008	1.024	0.437	2.750	-	-
368-1125	1.125	1.750	2.000	1.697	3.858	1.417	2.008	1.024	0.437	2.875	-	-
368-1250	1.250	1.875	2.125	1.819	4.252	1.417	2.008	1.024	0.437	3.000	-	-
368-1375	1.375	2.000	2.250	1.945	4.252	1.417	1.969	0.984	0.437	3.250	-	-
368-1500	1.500	2.250	2.500	2.169	4.724	1.535	2.008	1.024	0.563	3.375	3.500	-
368-1750	1.750	2.500	2.750	2.421	5.000	1.535	2.008	1.024	0.563	3.625	3.750	-
368-1875	1.875	2.625	2.875	2.551	5.000	1.555	2.016	1.024	0.563	3.750	3.875	-
368-2000	2.000	2.750	3.000	2.677	5.000	1.563	2.008	1.024	0.563	3.875	4.000	-
368-2125	2.125	2.875	3.125	2.795	5.906	1.535	2.008	1.024	0.689	-	4.250	4.375
368-2375	2.375	3.250	3.500	3.189	6.378	1.736	2.283	1.268	0.689	-	4.500	4.625
368-2500	2.500	3.375	3.625	3.339	6.496	1.732	2.283	1.268	0.689	-	4.625	4.750
368-2625	2.625	3.500	3.750	3.437	6.457	1.724	2.291	1.287	0.689	-	4.875	5.000
368-2750	2.750	3.750	4.063	3.626	7.008	1.846	2.614	1.555	0.689	-	5.125	5.250
368-3000	3.000	4.000	4.311	3.878	7.244	1.961	2.638	1.575	0.708	-	5.500	5.625
368-3250	3.250	4.375	4.685	4.126	7.480	1.961	2.638	1.594	0.708	-	5.875	6.025
368-3375	3.375	4.500	4.811	4.370	8.500	1.961	2.638	1.594	0.800	-	5.900	6.065
338-3750	3.750	4.875	5.185	4.626	7.992	1.969	2.756	1.024	0.800	-	6.225	6.375

© For special dimension could be manufactured and designed according to customer requirement.